


Vertical Curb and Gutter

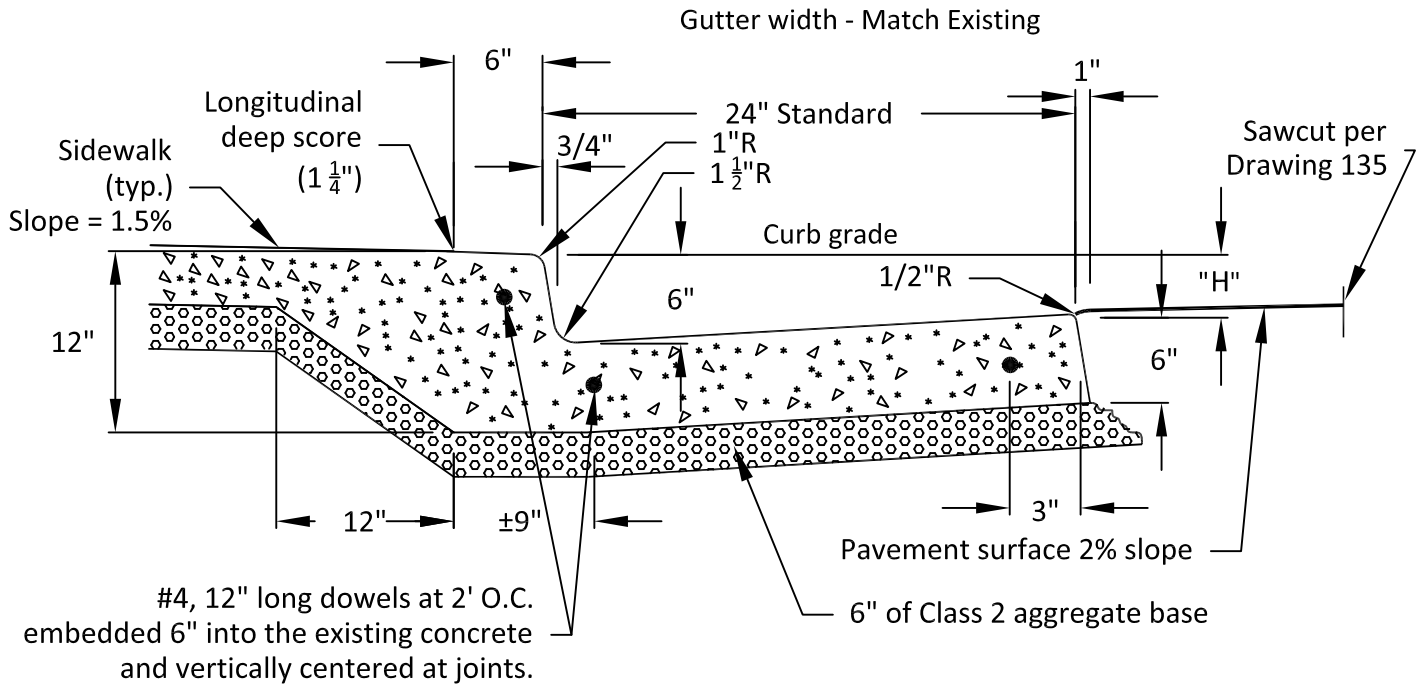


NOTES:

- Use 1/2" wide felt expansion material at each end of curb returns and a maximum of 60" O.C.
- Use #4, 12" long dowels at each expansion joint and at end of pours (3 dowels for 2 ft. and 3 ft. gutters, 5 dowels for 6 ft. gutters).
- Mark contraction joints 1-1/2" deep at 10 ft. centers.
- Surface finish to be light brooming.
- "H" dim = 5" with 1 ft. gutter;
- "H" dim = 4-1/2" with 2 ft. gutter;
- "H" dim = 4" with 3 ft. gutter
- "H" dim = 3" with 6 ft. gutter;
- Existing gutter widths vary (1 ft., 2 ft., 3 ft., or 6 ft.). Match existing.
- All new Asphalt Concrete patches shall be with 3/8" hot mix.
- No saw-cutting permitted parallel to the face of curb within the width of the gutter pan/
- When possible, pour Type A curb and gutter monolithically with sidewalks, driveways and PCC slabs.
- Install longitudinal deep score along entire back of curb.

Rev	By	Date
1	MN	10/25/04
2	JT	08/14/06
3	HQN	01/04/07
4	RTN	06/10/17
Scale: NTS		

<p>Vertical Curb and Gutter Type A Construction Detail</p>
<p>City of Palo Alto Standard</p>

Approved by:	
PE No.	72158
Date	01/10/18
Dwg No.	133